
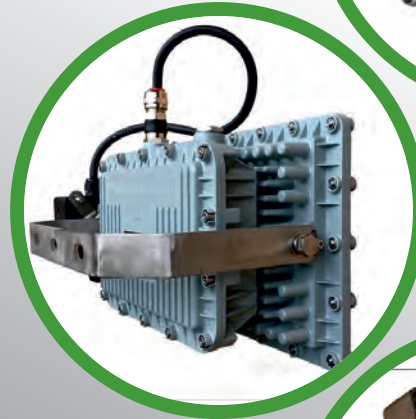


Navy Seal

- Explosion Proof Flood Light suitable for Zone 1 & Zone 2
- Heavy Duty stainless steel bracket SS316L
- 4mm thick tempered glass (4J impact)
- + 95% light transmission
- L70 (hrs) rated > 60.000 hours
- Heat Dissipation design
- High Performance LED chips
- Solid Power Driver for ambient temperature -20°C - + 55°C
- Extreme Durability IP67, Anti-Corrosion WF2, Water-Proof, Dust-Proof
- Heat Protection with separated cavities for the driver & the LED chips

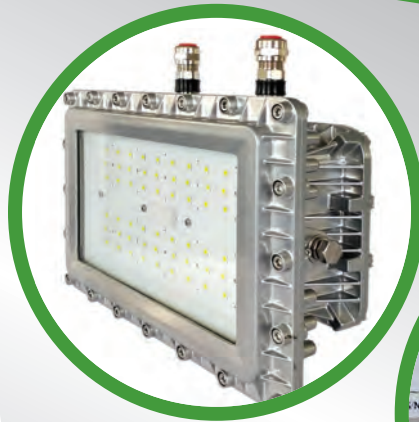

	Navy Seal -150	Navy Seal -200
Wattage	120 W, 150 W	160 W, 185 W, 200 W
Input voltage	100-277V, 50/60Hz	AC100-240V, 50-60Hz
Color/CCT	3000 K - 6500 K	3000 K - 6500 K
CRI	>Ra85	>Ra85
Lumen	16.800 - 21.000	22.400 - 28.000
Beam angle	30°/60°/90°/120°	30°/60°/90°/120°
Lifetime	>60.000 hours	>60.000 hours
Operating temperature	-30°C to +55°C	-30°C to +55°C
Warranty	3 years	3 years

Before



After

